



EV STATIONN

📍 8004 Winbrook Dr, Benbrook TX 76126

@ support@evstationn.com

☎ +1 650 444 1214

EVSTN 27

Level 2

Up to 48A



SMALL BUT POWERFUL



POWERFUL

Up to 48A / 11.5kW
of charging capacity.



COMPATIBLE

SAE J1772 compliant,
type 1 plug with 18ft cable.



CONVENIENT

Adjust power as needed,
48A-16A



CONNECTED

Connect EVC27 via
Wi-Fi & Bluetooth, use
APP to easily control
your charger.



POWER MANAGEMENT

Protects the property's
fuse, allowing drivers to
recharge their vehicles
without disrupting their
property's electrical
supply..



DURABILITY

IP65 and IK08
protection ratings,
allowing for
indoors or outdoors



DATASHEET

Model No	JNT-EVSTN27/16AC	JNT-EVSTN27/32AC	JNT-EVC27/40AC	JNT-EVC27/48AC
Input Voltage	208-240Vac	208-240Vac	208-240Vac	208-240Vac
Frquency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Amperage	16A	32A	40A	48A
Max. Power Output	3.8Kw	7.6Kw	9.6Kw	11.5Kw
Net Weight	8.3lbs	10.7lbs	13.7lbs	14.8lbs
Gross Weight	11.7lbs	14.1lbs	17.1lbs	18.2lbs
Product Dimensions	8.7"x 8.7"x 3.7"			
Package Dimensions	16.4"x 12"x 10.6"			


Protection & Standard

Charging Interface	SAE J1772 Compliant, Type 1 Plug
Safety Compliance	UL2594, UL2231-1/-2
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection

Environmental

Operating Temp.	-22 F to 122 F
Relative Humidity	Up to 95% non-condensing
Cable Length	18ft Standard (25ft Optional with Surcharge)

OCPP 1.6J, CONNECTED SUCCESSFULLY WITH 50+ GLOBAL EVC PLATFORMS

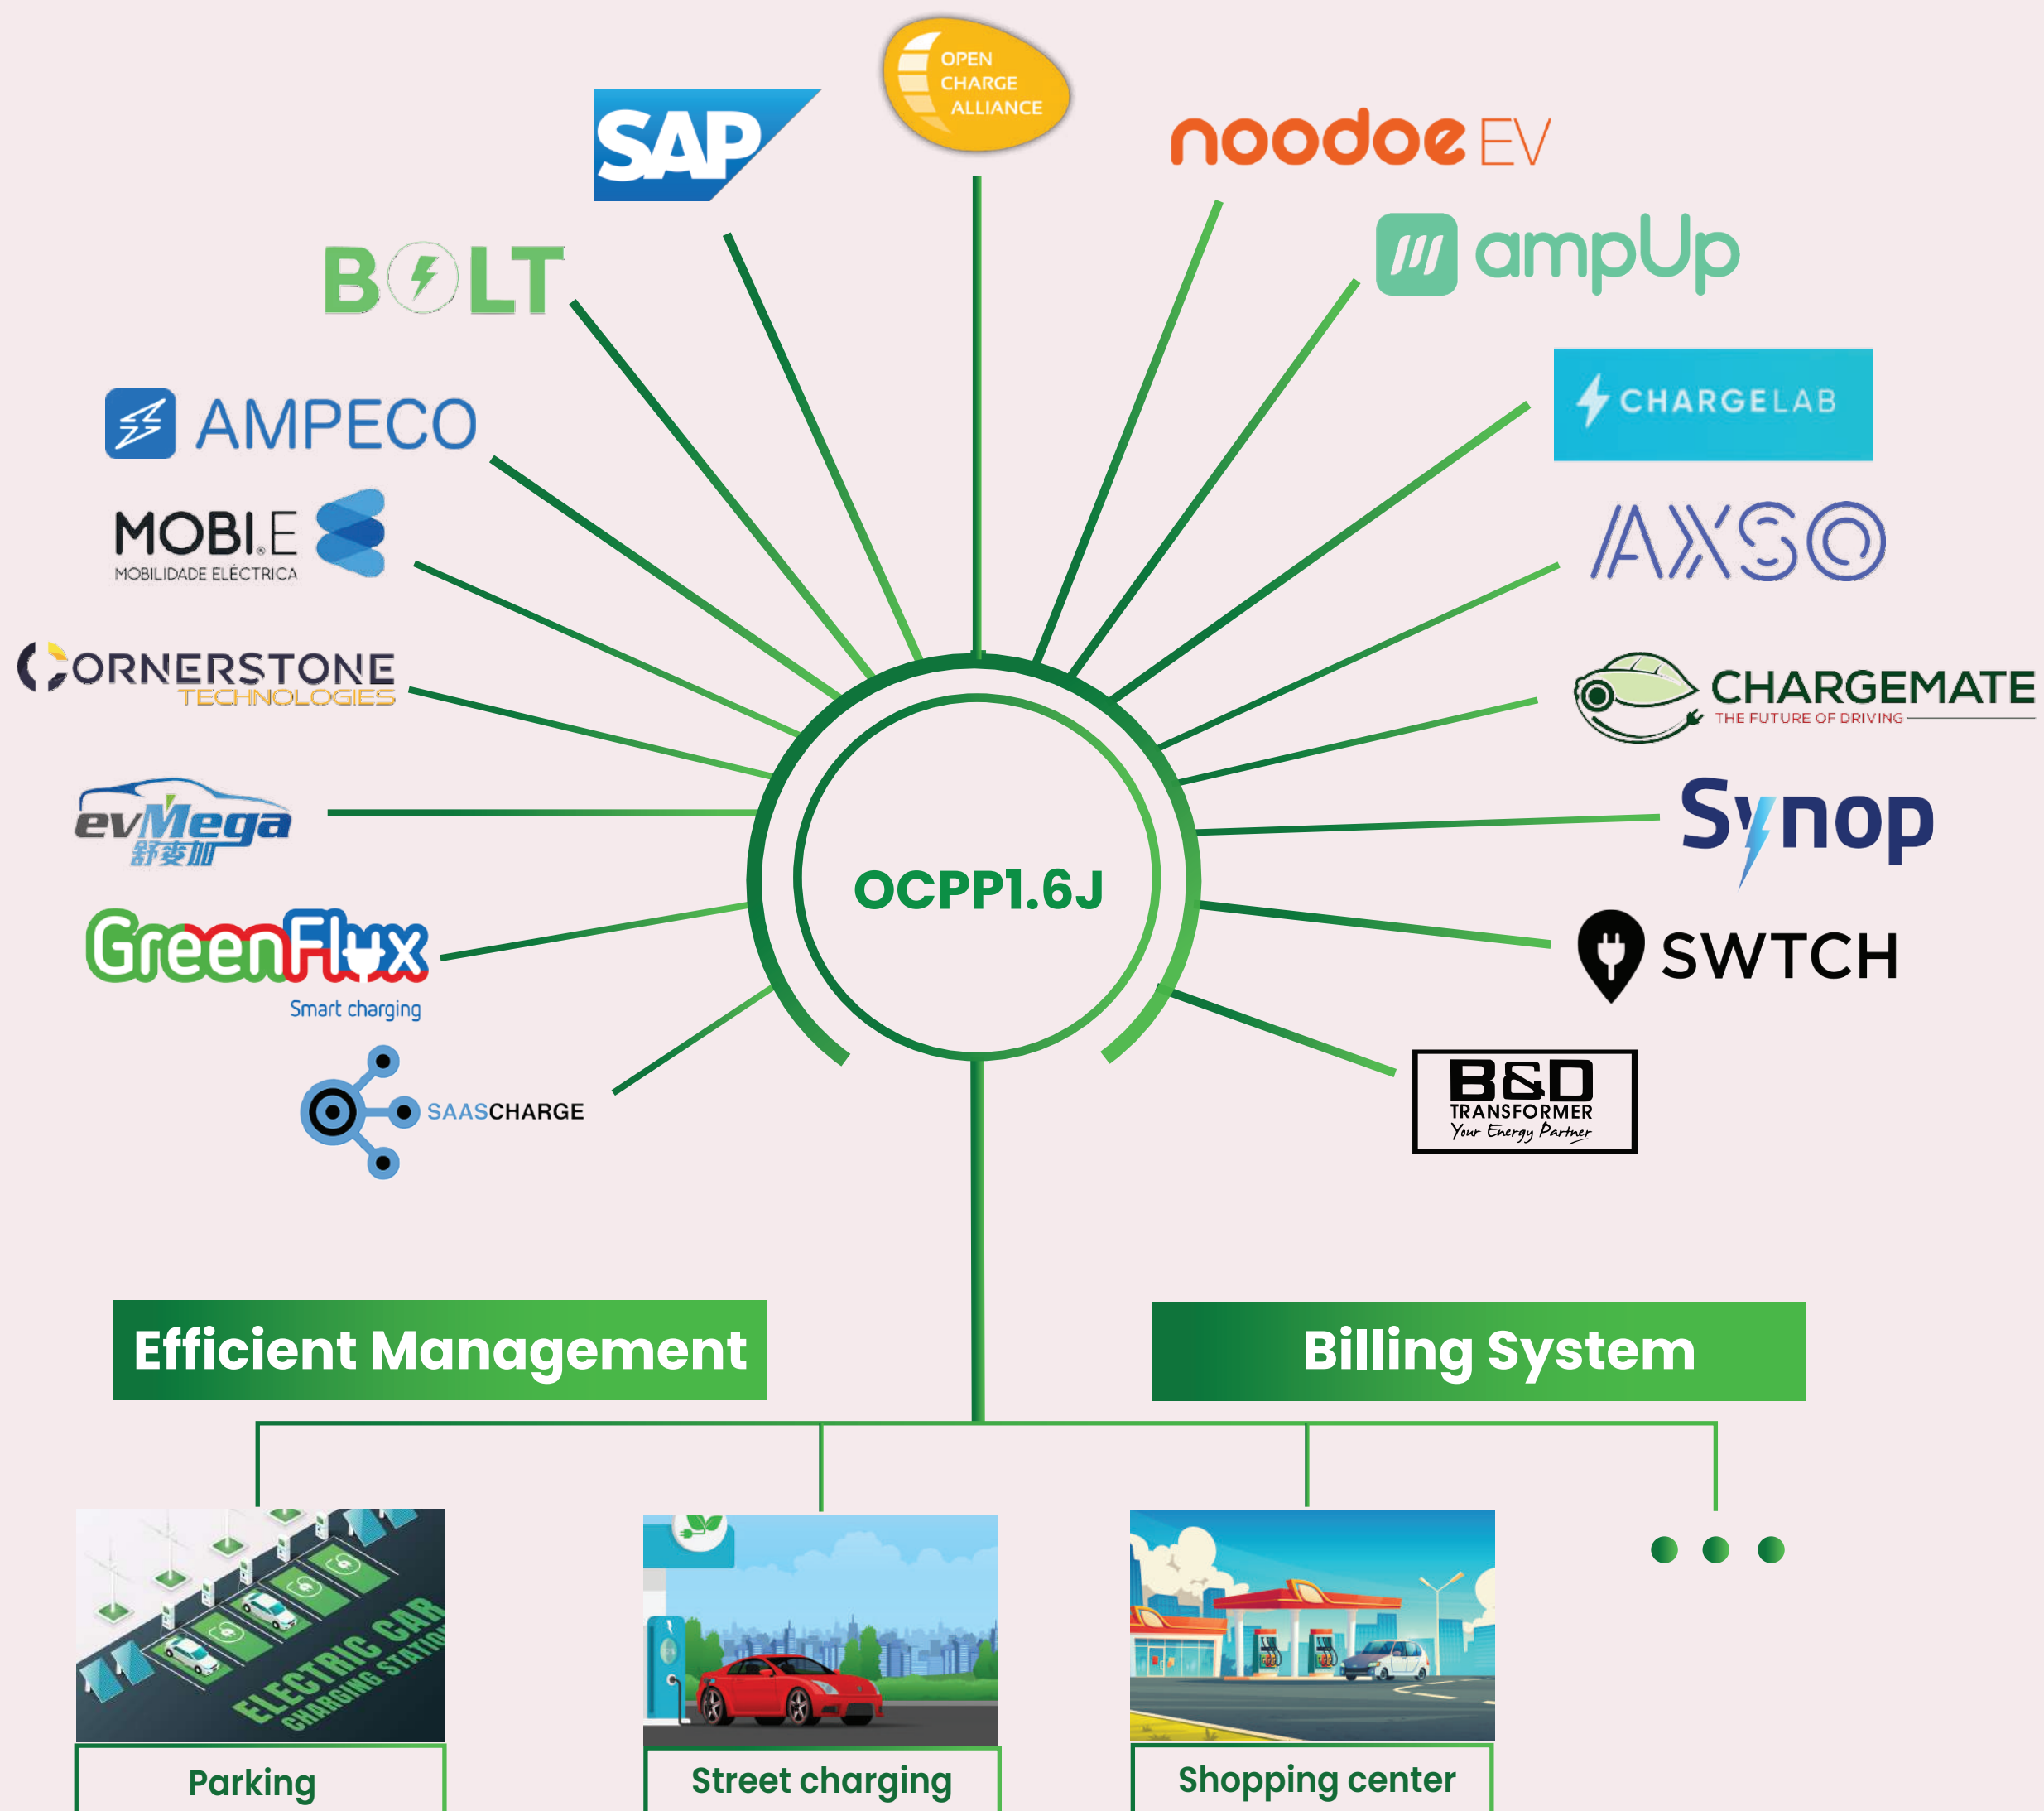


INDOOR & OUTDOOR

Pure PC material, Anti-UV treatment, and over 3 years yellow resistance



IP54 / TYPE3 (BOX IP65)



IK08

HOME APP

Manage your charging activity

- Connect via Wifi or Bluetooth
- Remote start or stop charging
- Schedule your charging time
- Adjust the output from 48A to 6A
- View charging history and power consumption
- Restart button




GET IT ON
Google Play




Download on the
App Store

EASY INSTALLATION

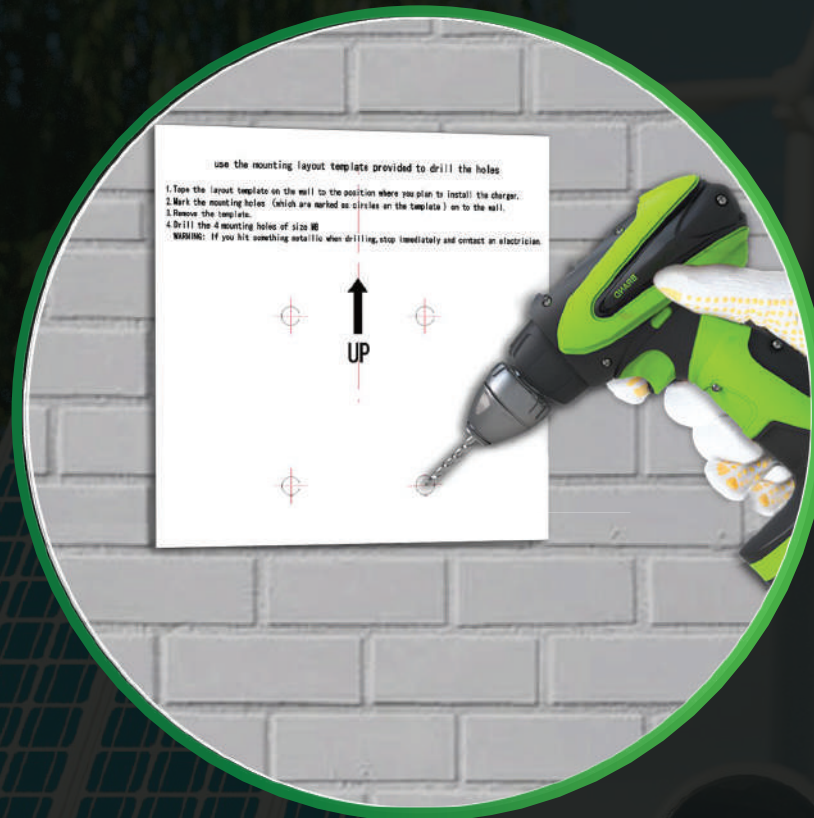

Step 1

- Drill 4 screw holes with diameter of 8mm and a depth of 52mm by using mounting templates.

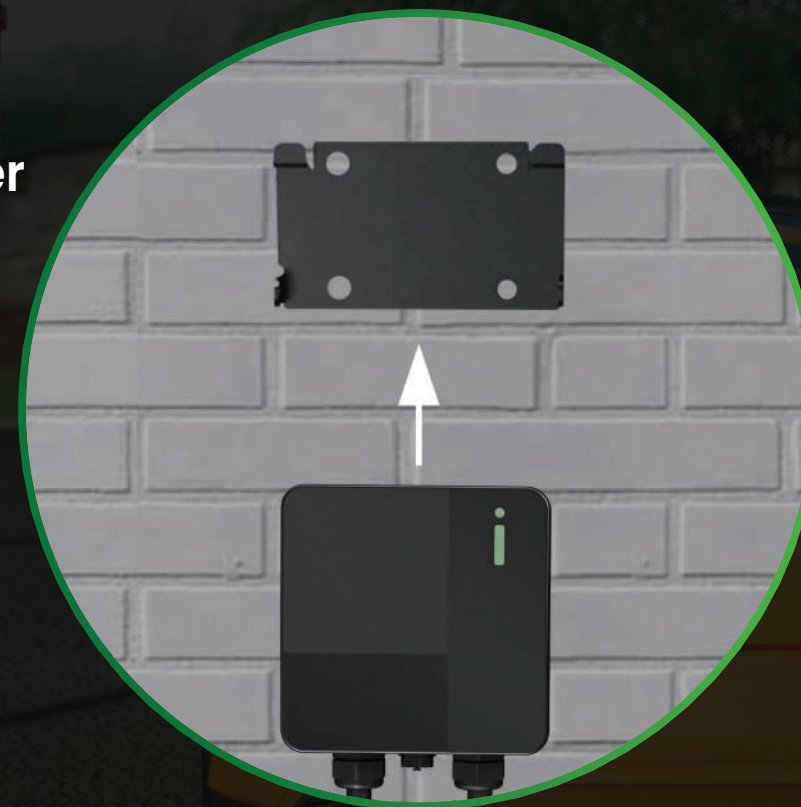

Step 2

- Align the rear notch of charger into the wall-mounted bracket
- Use 4 sets expansion screw and M6 screw to fix the wall-mounted bracket on the wall.



Step 3

- Fix two M5 screws to complete the installation
Drill 4 Screw Holes with a diameter of 8mm and a