



EV STATIONN

📍 8004 Winbrook Dr, Benbrook TX 76126

@ support@evstationn.com

☎ +1 650 444 1214

EVSTN D1

Level 2

Up to 96A



ONE CHARGER, TWO OUTPUT



POWERFUL

Adjust power as needed, the maximum can be 48A+48A/11.5kW+11.5kW.



SAFER

Ground fault detection, protecting people from shock.



CONVENIENT

Automatic fault detection and repair, easier for maintenance.



CONNECTED

Complete with LAN or Wi-Fi connectivity (4G optional), ensuring chargers are always online..



OCPP

OOCPP 1.6J help you connect EV charger to the cloud.



DURABILITY

IP65 and IK08 protection ratings, allowing for indoors or outdoors

Indoor & Outdoor



IP54 / TYPE3 (BOX IP65)

IK08




DATASHEET


Model No	JNT-EVSTND1/96AC
Input Voltage	208-240 Vac
Frquency	50-60Hz
Amperage	48A+48A
Max. Power Output	11.5kW+11.5kW
Product Dimensions	18.5"x 13.4"x 4.4"
Protection & Standard	
Charging Interface	SAE J1772 Compliant, Type 1 Plug
Safety Compliance	UL2594, UL2231-1/-2
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection
Environmental	
Operating Temp.	-22 F to 122 F
Relative Humidity	Up to 95% non-condensing
Cable Length	25ft Standard



OCPP 1.6J, CONNECTED SUCCESSFULLY WITH 50+ GLOBAL EVC PLATFORMS

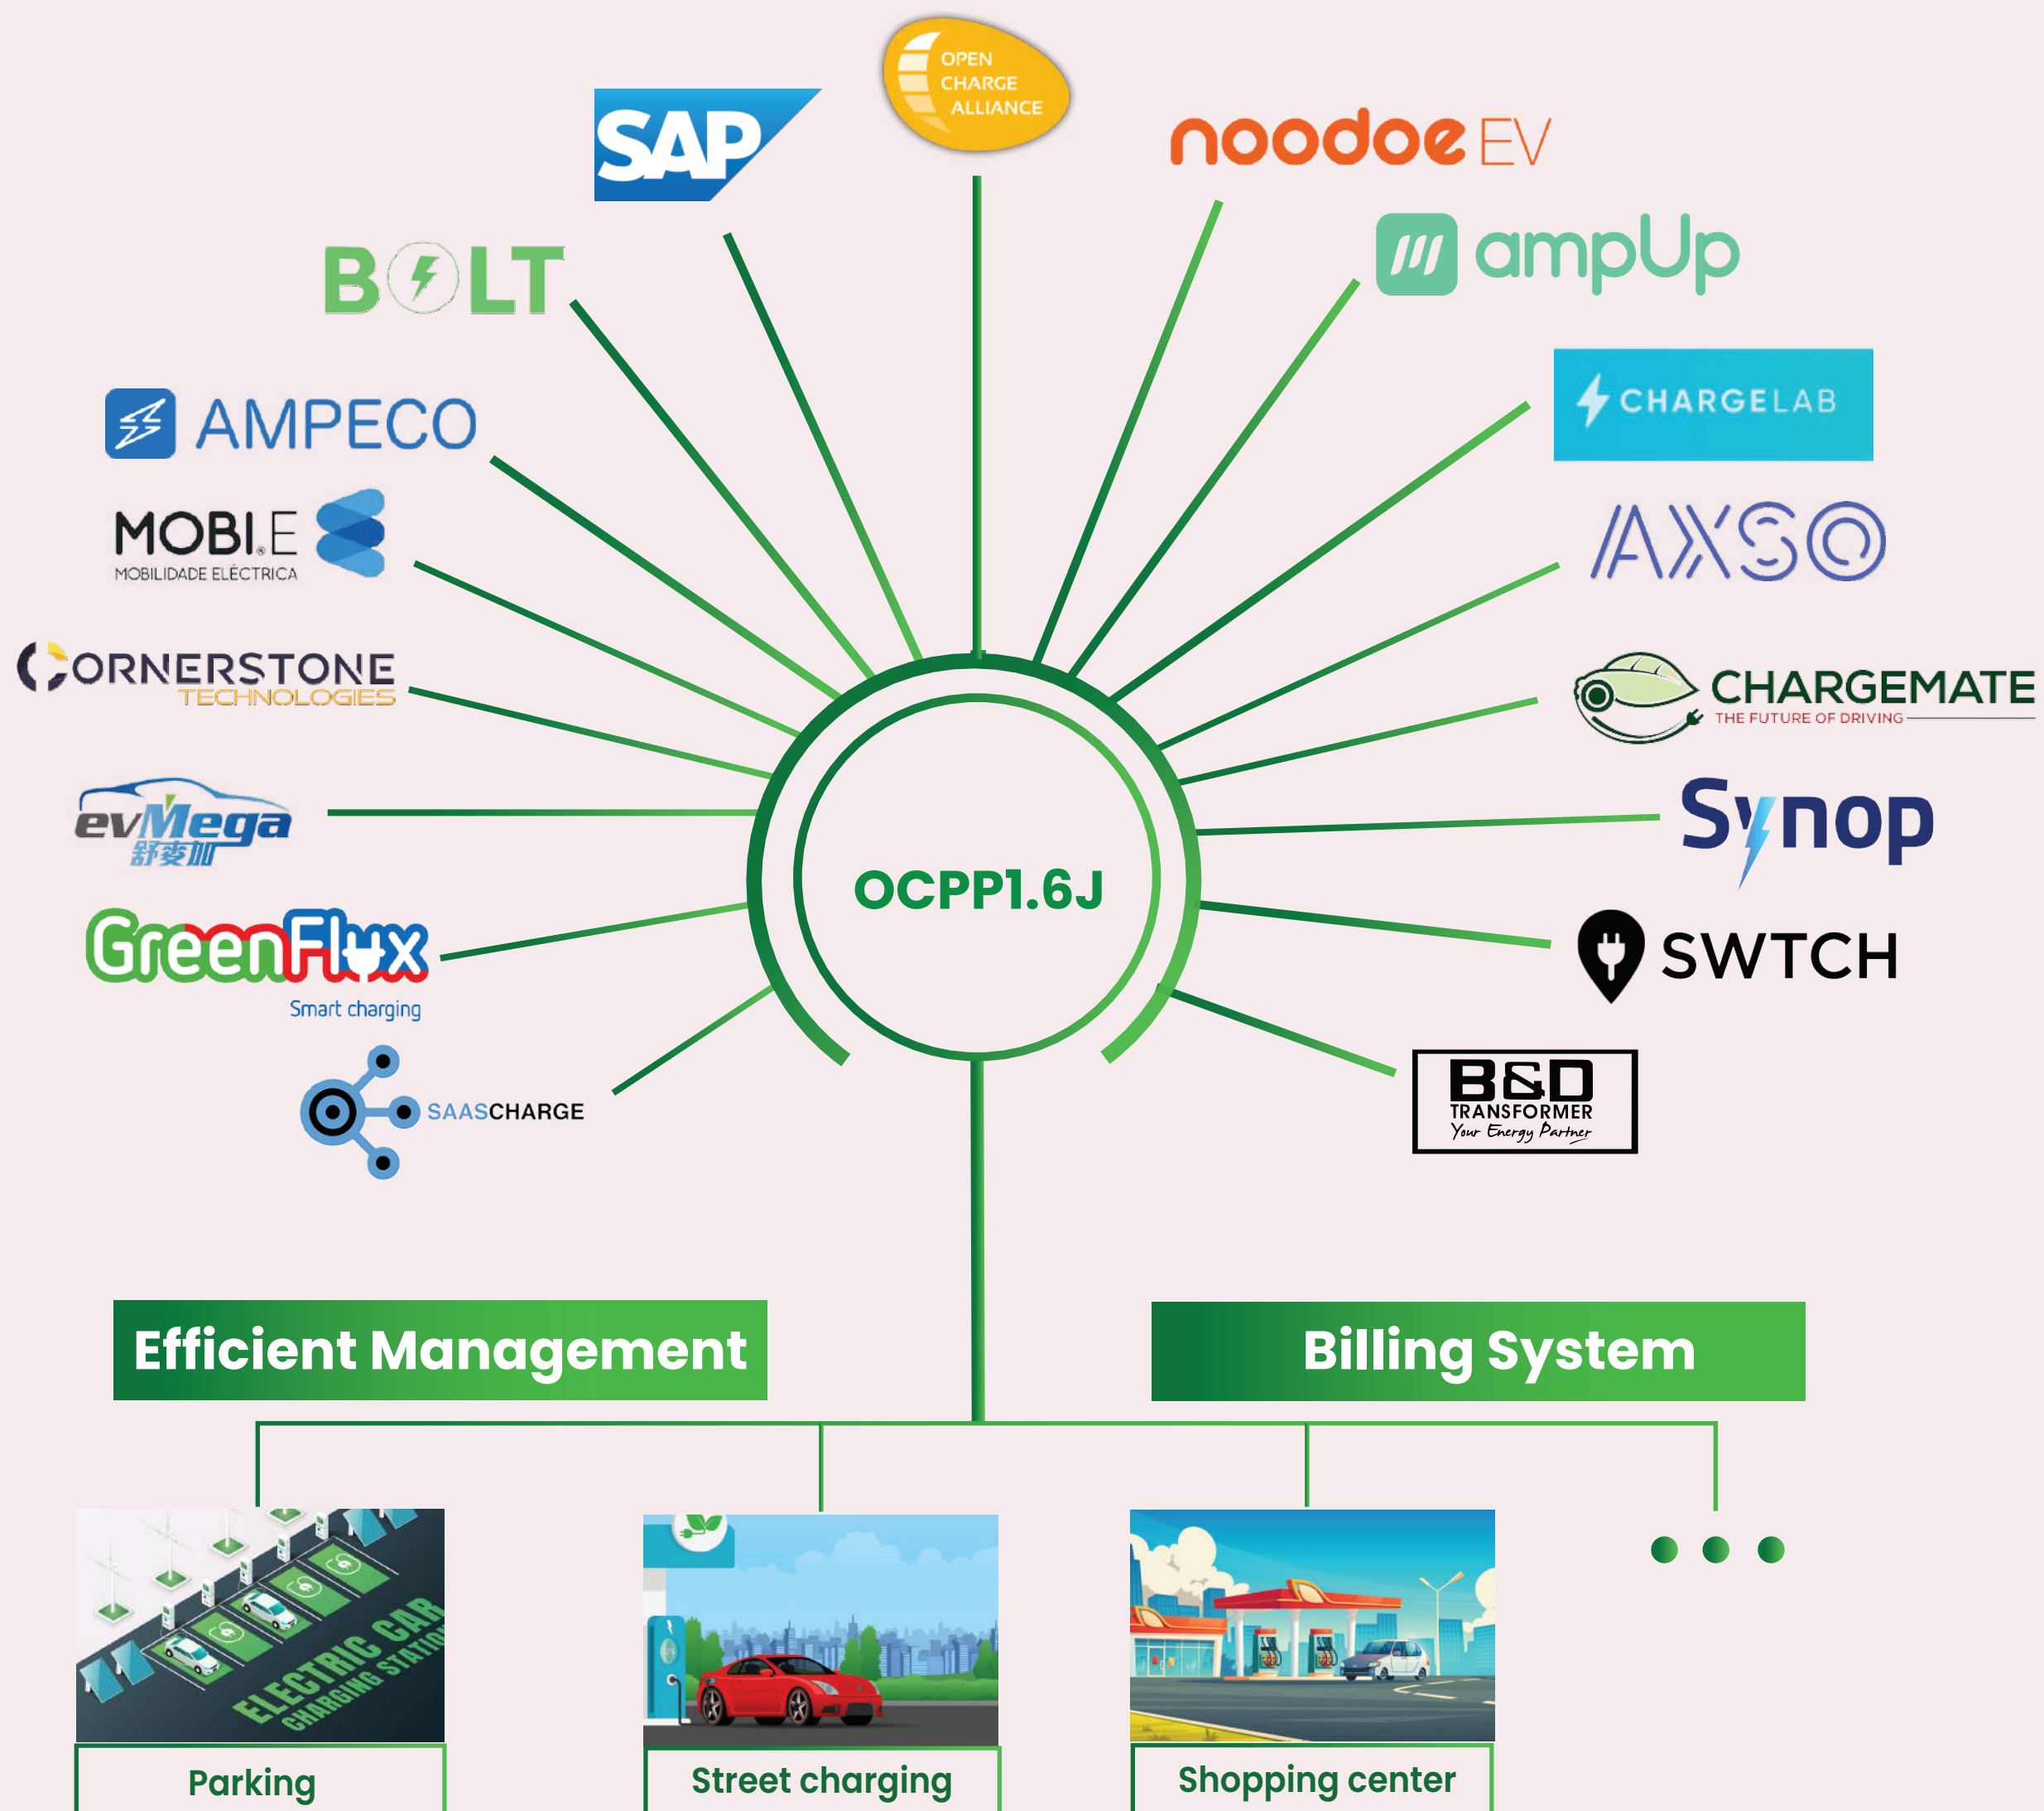

EASY INSTALLATION

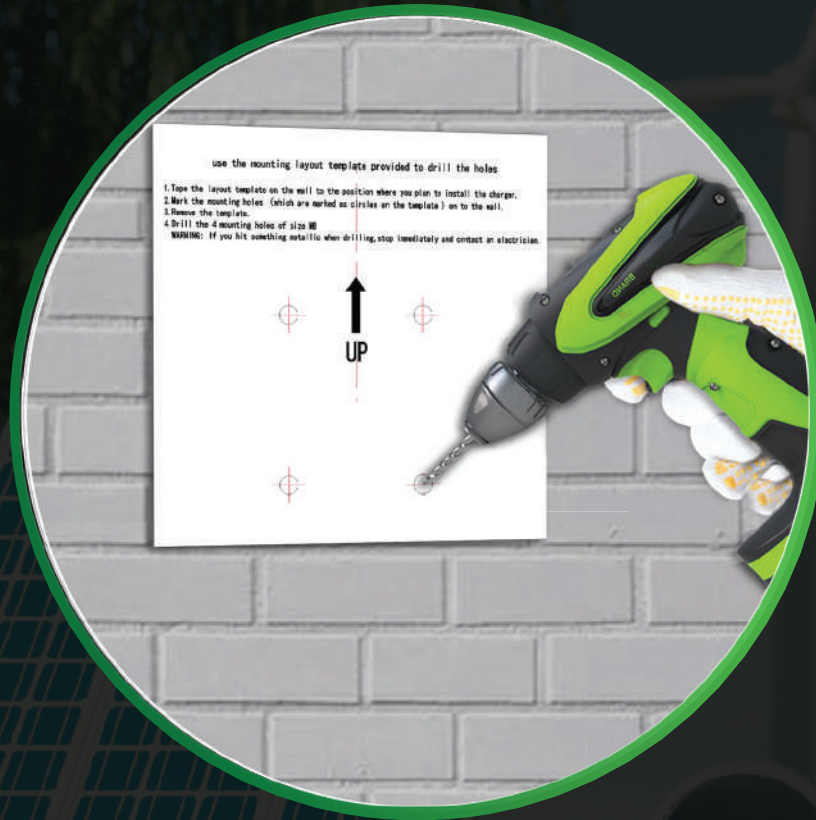


Step 1

- > Drill 4 screw holes with diameter of 8mm and a depth of 52mm by using mounting templates.

- > Align the rear notch of charger into the wall-mounted bracket.
- > Use 4 sets expansion screw and M6 screw to fix the wall-mounted bracket on the wall.

Step 2

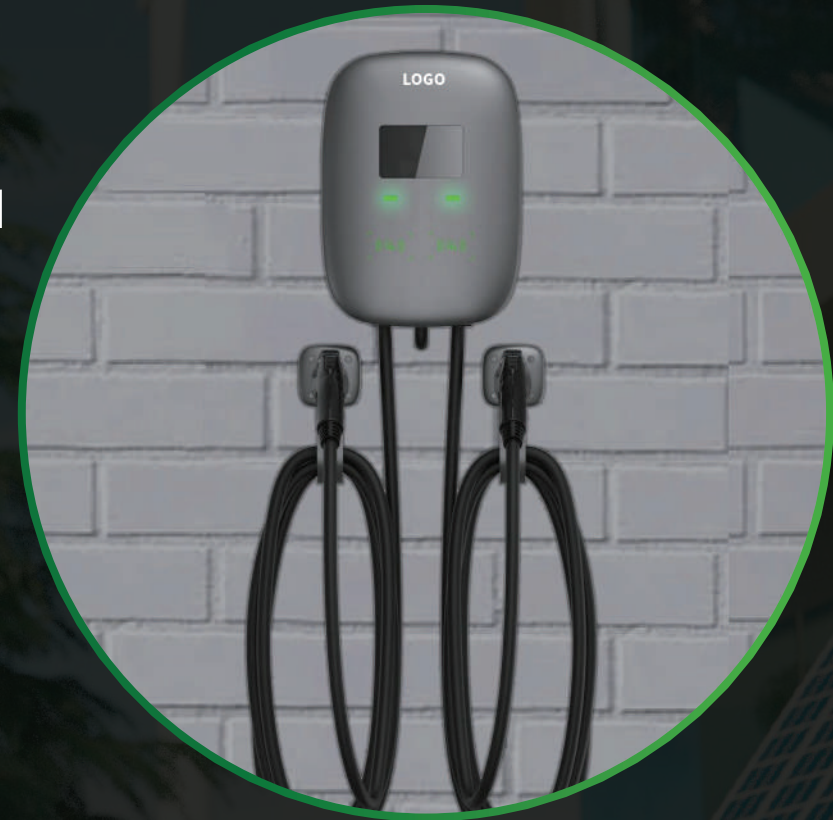

Step 3

- > Fix two M5 screws to complete the installations

