



EV STATIONN

📍 8004 Winbrook Dr, Benbrook TX 76126

@ support@evstationn.com

☎ +1 650 444 1214

EVSTND 100

Level 2

60/90/120/150/180 Kw

2 years
limited
warranty



ISO 15118

(Plug&Charge)
enhances customer
experience.



COMPATIBLE

CCS type 1 plug
with 13ft cable..



DURABILITY

NEMA 3R and IK10
protection ratings,
allowing for indoors
or outdoors.



INTERACTION

7 inch touch screen
with user friendly
interface.




Network

Complete with LTE &
Wi-Fi & Ethernet
connectivity,
ensuring chargers are
always online.



CONNECTIVITY

OCPP 1.6J help you
connect EV charger
to the cloud.

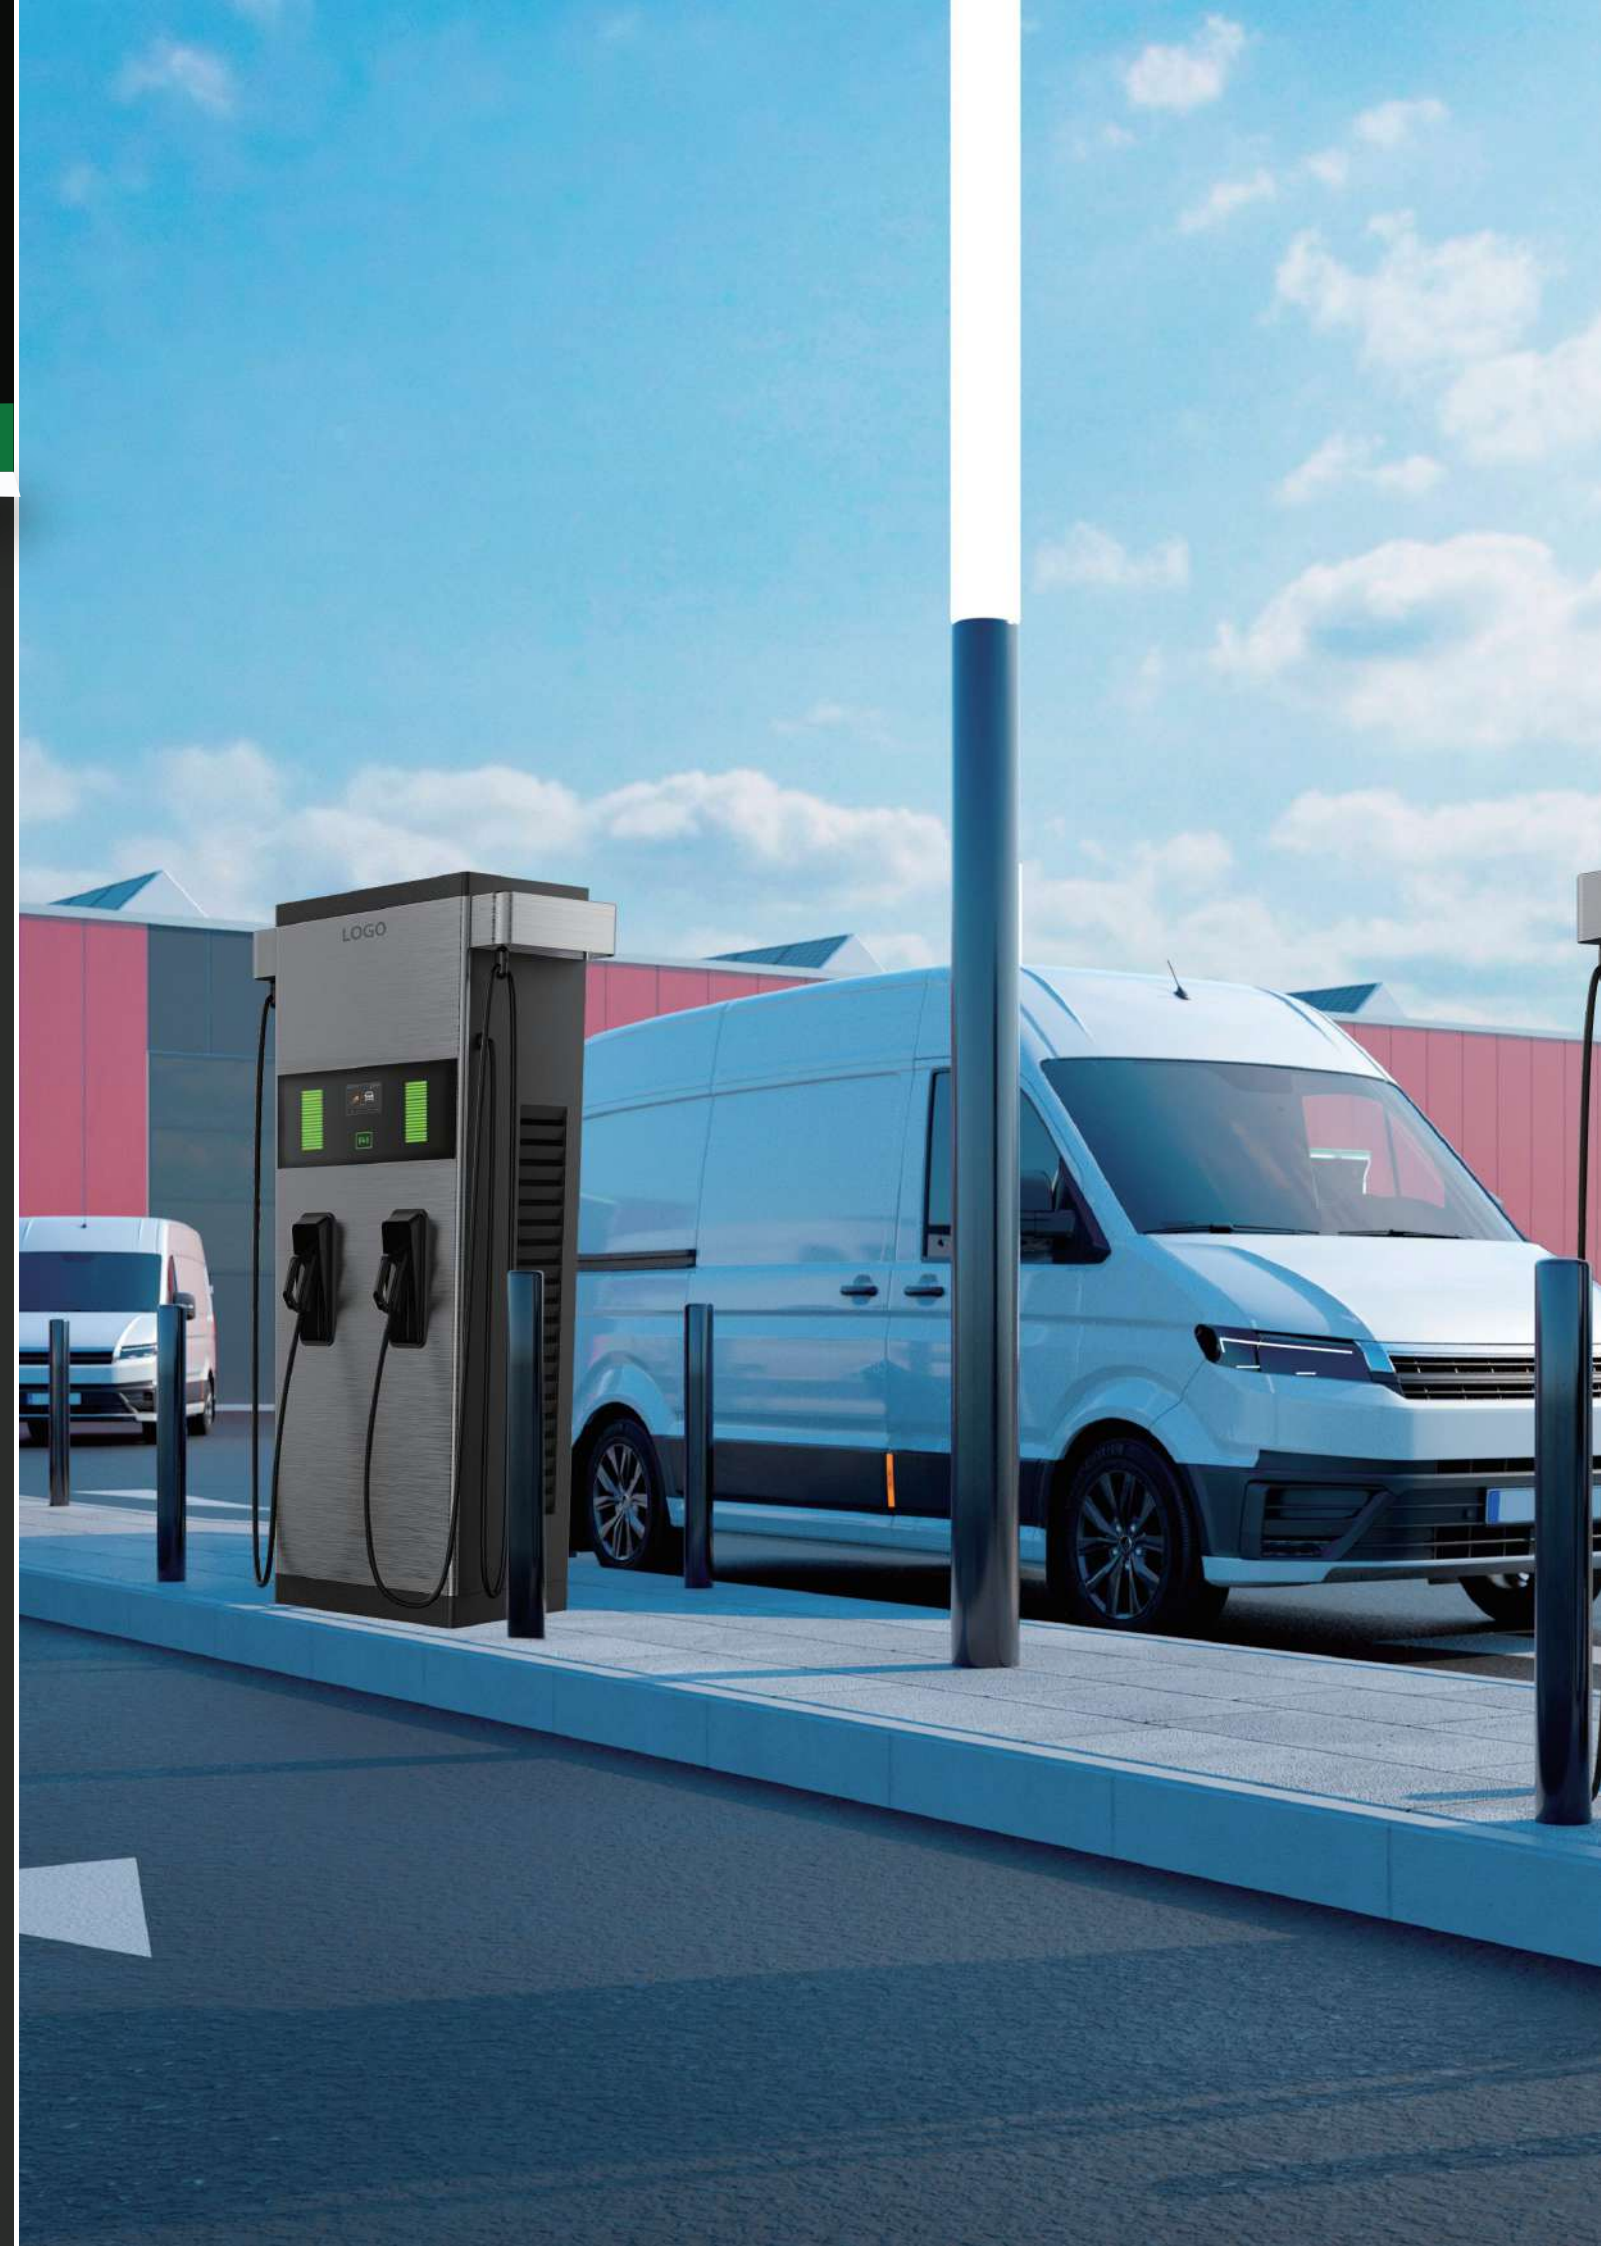

DATASHEET						
Model No.		EVSTND100/060	EVSTND100/090	EVSTND100/120	EVSTND100/150	EVSTND100/180
AC Input	Number of phase/wire	3ph/L1, L2, L3, N, PE				
	Voltage Rating	480Vac(+10%, -15%)				
	Max. Input Amperage	100A	135A	180A	226A	270A
	Frequency	50~60Hz				
	Power factor	PF≥0.98@Rated load				
	Efficiency	>96%				
DC Output	Maximum Power	60KW	90KW	120KW	150KW	1800KW
	Voltage Operating Range	200-1000V				
	Maximum Current	60A@1000Vdc	90A@1000Vdc	120A@1000Vdc	150A@1000Vdc	180A@1000Vdc
	Connector and Cable	CCSI with 18ft cable				
Function						
EV Communication		ISO 15118				
User Authentication		ISO 14443 A/B				
Display		7 inch touch screen				
Network		Ethernet, LTE, Wi-Fi				
Connectivity		OCPP 1.6J				
Protection & Standard						
Certificate		ETL, FCC				
Safety Compliance		UL2202, UL2231-1, UL2231-2				
Multiple Protection		OVP, UVP, OPP, OTP, SPD, RCD, IMD, OCP				
Warranty		2 years				
Environmental						
Storage Temperature		-40°F to 158°F				
Operating Temperature		-22°F to 122°F				
Anti-vandalism		IK10(not include LCD & RFID cover)				
Ingression		NEMA 3R				
Relative Humidity		Up to 95% non-condensing				
CoolingI		Forced Air				
Operating noise level		≤65dB				
Altitude		≤6561ft				