



EV STATIONN

📍 8004 Winbrook Dr, Benbrook TX 76126

@ support@evstationn.com

☎ +1 650 444 1214

EVSTN 10

Level 2

Up to 80A



READY TO HANDLE THE MOST POWERFUL EV BATTERIES



POWERFUL

Up to 80A / 19.2kW of
charging capacity



COMPATIBLE

SAE J1772 compliant,
type 1 plug with 18ft cable.



CONVENIENT

Adjust power as needed,
80A-48A, 48A-16A



CONNECTED

Complete with
LAN connectivity
(Wi-Fi or 4G optional),
ensuring chargers are
always online.



OCPP

OCPP 1.6J help you
connect EV charger
to the cloud.




DURABILITY

IP65 and IK08
protection ratings,
allowing for
indoors or outdoors




DATASHEET						
Model No	EVSTN10/16AC	EVSTN10/32AC	EVSTN10/40AC	EVSTN10/48AC	EVSTN10/70AC	EVSTN10/80AC
Input Voltage	208-240 Vac					
Frquency	50-60Hz					
Amperage	16A	32A	40A	48A	70A	80A
Max. Power Output	3.8Kw	7.6Kw	9.6Kw	11.5Kw	16.8Kw	19.2Kw
Net Weight	13.8lbs	13.8lbs	16.8lbs	18.1lbs	19.8lbs	19.8lbs
Gross Weight	16.1lbs	16.1lbs	19.0lbs	20.3lbs	22.5lbs	22.5lbs
Product Dimensions	13.8"x 9.8"x 5.1"				13.8"x 9.8"x 5.1"	
Package Dimensions	19.6"x 13.7"x 10.7"				19.6"x 13.7"x 10.7"	
Protection & Standard						
Charging Interface	SAE J1772 Compliant, Type 1 Plug					
Safety Compliance	UL2594, UL2231-1/-2					
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection					
Environmental						
Operating Temp.	-22 F to 122 F					
Relative Humidity	Up to 95% non-condensing					
Cable Length	18ft Standard (25ft Optional with Surcharge)					

OCPP 1.6J, CONNECTED SUCCESSFULLY WITH 50+ GLOBAL EVC PLATFORMS

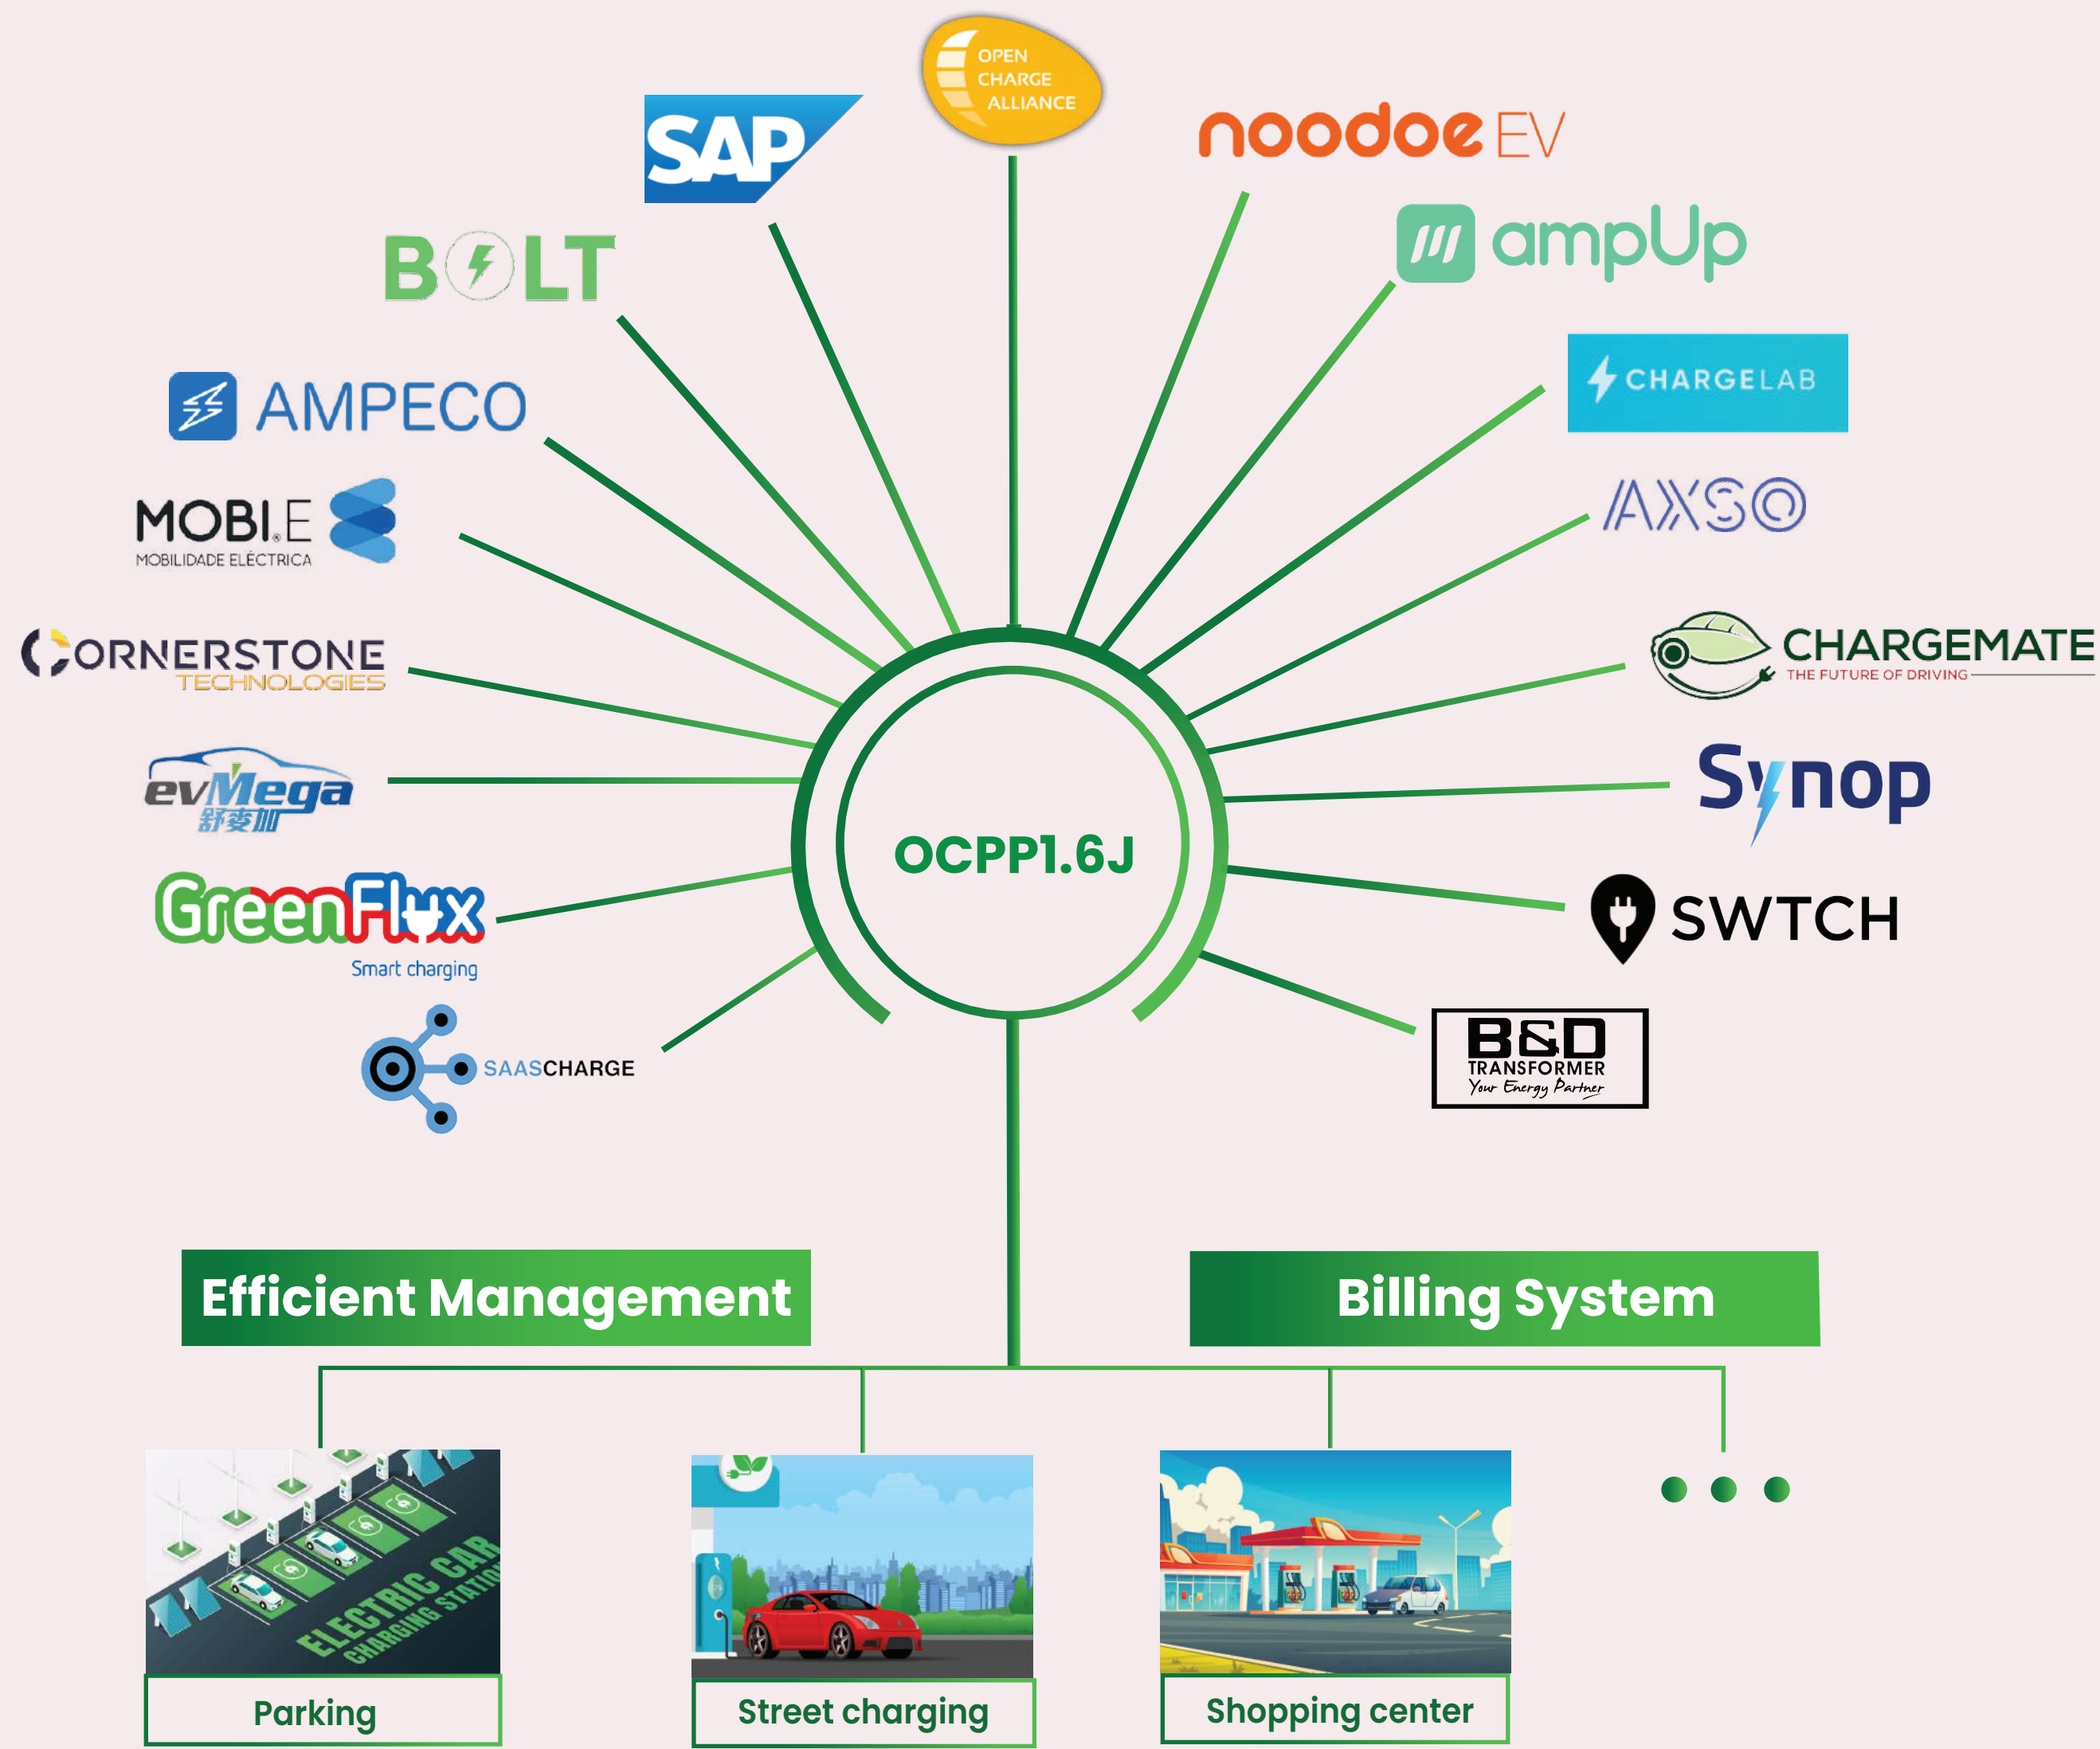

EASY INSTALLATION

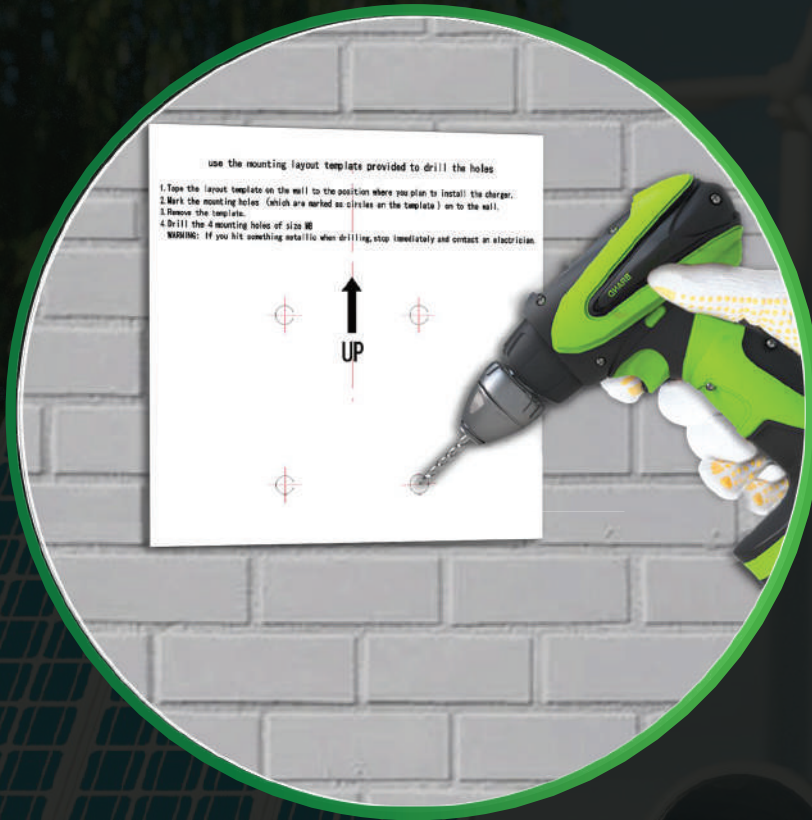

Step 1

- > Drill 4 screw holes with diameter of 8mm and a depth of 52mm by using mounting templates.

- > Align the rear notch of charger into the wall-mounted bracket
- > Use 4 sets expansion screw and M6 screw to fix the wall-mounted bracket on the wall.

Step 2



Step 3

- > Fix two M5 screws to complete the installations





EV STATIONN

📍 8004 Winbrook Dr, Benbrook TX 76126

@ support@evstationn.com

☎ +1 650 444 1214

